

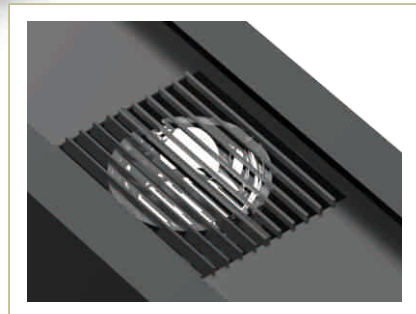


## XD-30-05/LED wall washer

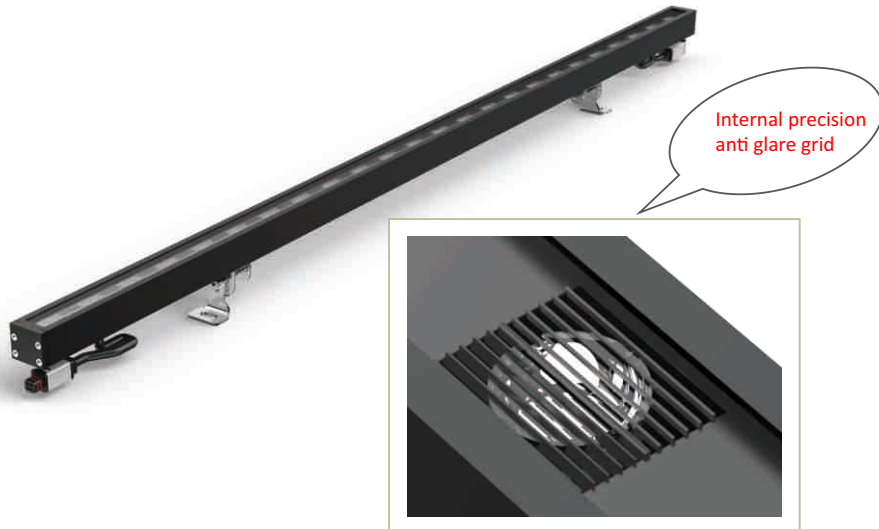

0.2mm deviation 85° accurate cutting light direction

Size:

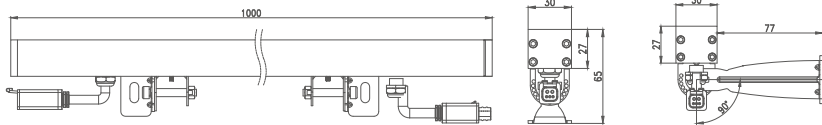

## XD-30-05/LED wall washer

Features:

1. Minimalist lamp body with design patent conforms to modern industrial aesthetic standard
2. The whole structure waterproof adopts the new patented technology and technology of extrusion silicone strip
3. Square quick waterproof joint adopts patent technology of automobile piston type with nano breathing valve
4. Anti glare system adopts 0.2mm precision grid deflection 85° precision cutting light patent technology
5. 304 stainless steel with locking function damping rotating bracket with patented technology as standard

Parameter:

| Lamp Parameter             |                                     | LED parameter                           |   |
|----------------------------|-------------------------------------|---|---|
| Beam Angle                 | 20° 40° 60°                         | LED chip                                | Cree/OSRAM  |
| case material/color        | Aviation grade aluminum alloy(Grey) | LED Item                                | XTE/3030  |
| Cover material/color       | Tempered glass                      | CCT                                     | Single color  |
| IP rate                    | IP66 structure waterproof           | LED Life                                | 50000h  |
| Lamp Power                 | 18W/24W                             | Other Parameter                         |   |
| Input Voltage              | DC24V                               | Cable size                              | 5 pins rubber cable(power cable 1 mm <sup>2</sup> ,signal cable 0.3mm <sup>2</sup> ), connector:φ16mm Aluminium alloy+φ1.5mm Gold-plated solid Pins |
| Pixel segment              | /                                   | Cable length                            | 150mm   |
| Light Efficiency           | 75lm/w(white)                       | Fixing clip                             | 304 Stainless steel   |
| Light angle                | 200° adjustable                     | Light distribution                      |   |
| Cable location             | From the bottom                     | <p>平均光束角(50%) : 20.3度<br/>9.5, 11.4</p> |   |
| Control way                | ON-OFF /DMX512                      |   |   |
| Series connection quantity | 8pcs                                |   |   |