


MA-160-01/LED Flood Light



Size:

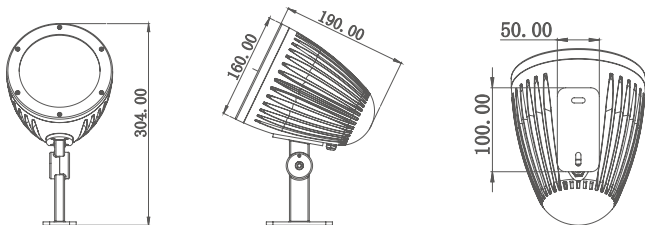

MA-160-01/LED Flood Light

Features:

1. The feather ball lamp body with design patent conforms to the application vision of ancient tile surface
2. The whole structure waterproof adopts mechanical pressure locking silica gel pad technology to ensure high and low temperature durability
3. Special ultra long distance precise projection technology and 93% light transmittance ultra clear glass
4. Adopt die-casting aluminum lamp body and composite metal high efficiency heat dissipation patent technology
5. According to the site installation requirements, various mounting brackets can be selected

Parameter:

Lamp Parameter		LED parameter	
Beam Angle	6° 10° 20° 30° 45° 60°	LED chip	Cree
Case material/color	Dia-casting aluminum (black)	LED Item	XPG/XPL
Cover material/color	Ultra clear tempered glass	CCT	Single color
IP rate	IP66 structure waterproof	LED Power	5W /10W
Lamp Power	48W/54W	Other Parameter	
Input Voltage	DC24V/AC85-265V	Cable size	3pins 1.5mm ² rubber cable
PF	0.9	Cable length	300mm
Light Efficiency	85lm/w(white)	Fixing clip	Die-casting aluminum
Light angle	180°adjustable	Light distribution	
Cable location	From the bottom	<p>光量: 60 C0/140 2.9,3.2 C90/270 3.0,3.1 平均光衰角(50%): 6.1度</p>	
Control way	ON-OFF /DMX512		
Environment temperature	-30°C~+35°C		